

# CONFIX™ SH 0000 00

CONFIX™ WST 000 000 00 0000



CONFIX™ SH 000 000 0000 00000 00000.

000 000 00 000 00000.

RoHS  
compliant

REACH  
COMPLIANCE

00 0 00

00000

UL94-V2


-40 C° to 140 C°

000 00, 00000

00 00

00 000

00 00 0 00

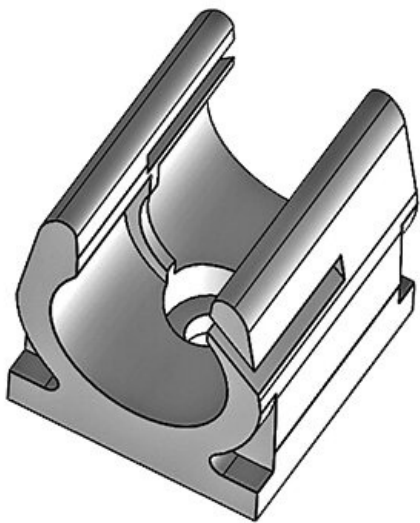

EAN

31300

00 0 0

1

4251269300

000 00

4,5 mm

134

10


20 mm

18 mm


21 mm

NW 10


EAN 31310 1  
4251269300 4,5 mm  
141  
10  
20 mm  
24 mm  
26 mm  
NW 14

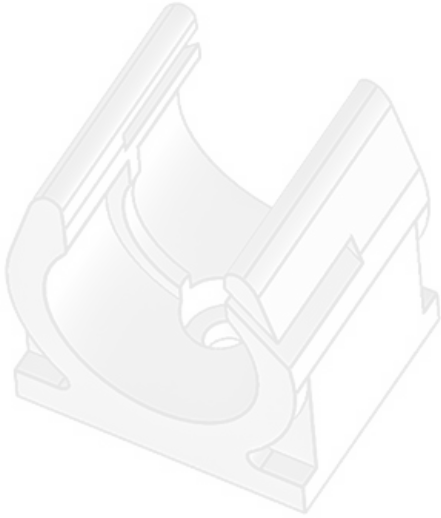


EAN 31315 1  
4251269322 6,5 mm  
464  
10  
20 mm  
30 mm  
35 mm  
NW 16

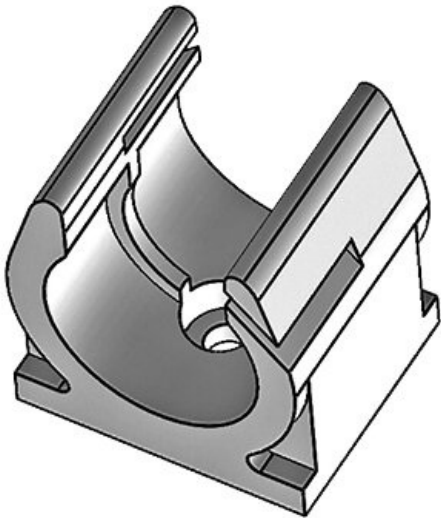


EAN 31320 1  
4251269300 5,5 mm  
158  
10  
20 mm  
35 mm  
35 mm  
NW 20

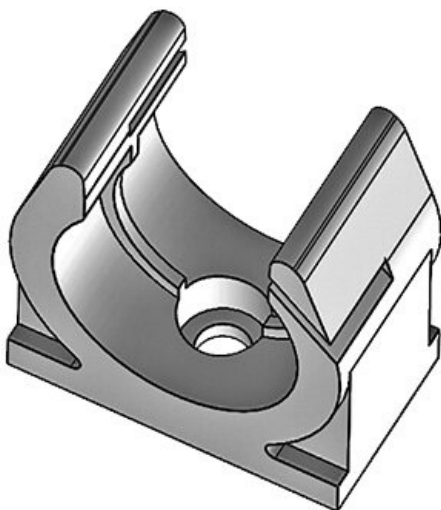


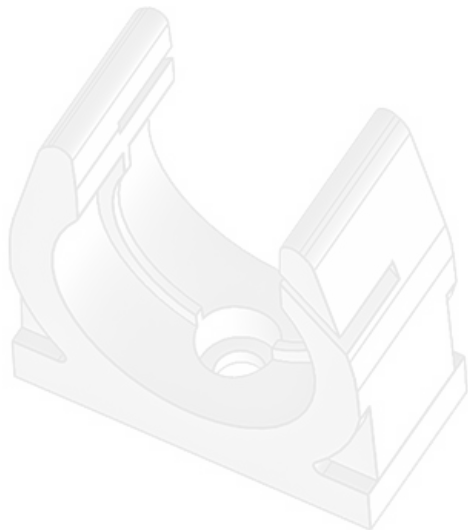

EAN 31330 1  
4251269300 5,5 mm  
165  
10  
20 mm  
42 mm  
44 mm  
NW 23

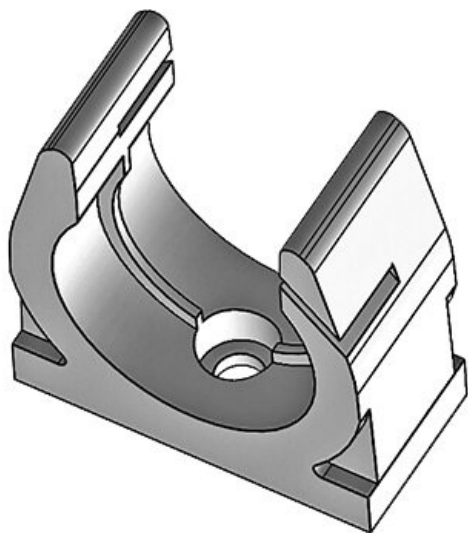

EAN 31335 1  
4251269319 5,5 mm  
068  
10  
20 mm  
48 mm  
48,5 mm  
NW 29

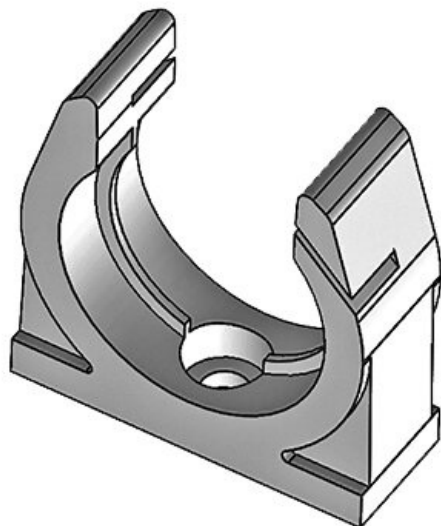

EAN 31340 1  
4251269300 7,1 mm  
172  
10  
20 mm  
55 mm  
56,5 mm  
NW 37

EAN

31350

□□ □□

1

4251269300

□□□ □□

7,1 mm

189


10

20 mm

67 mm

68 mm

NW 45

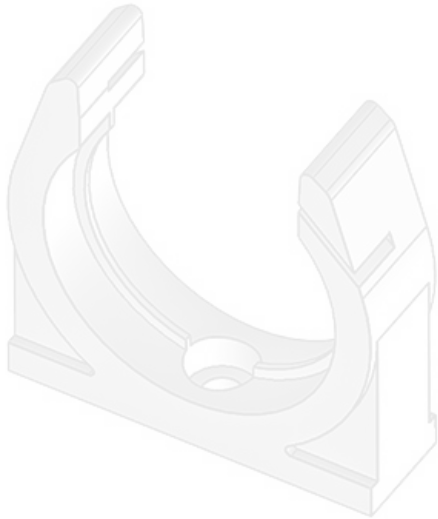

EAN

31360

□□ □□

1

4251269300

□□□ □□

7,1 mm

196


10

20 mm

100 mm

101 mm

NW 70

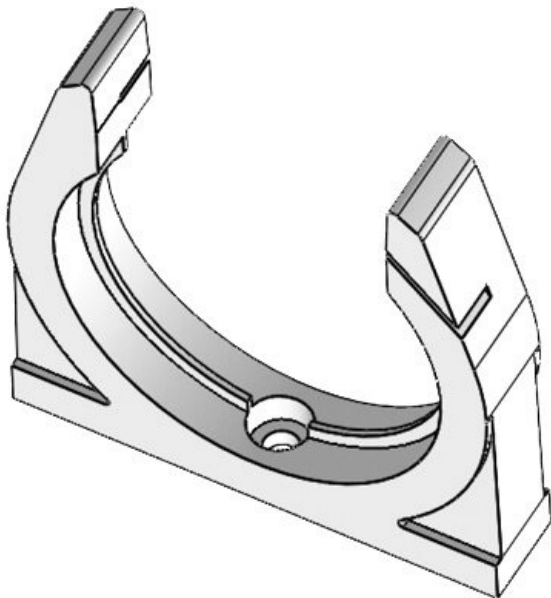

**icotek**<sup>®</sup>  
smart cable management