

KT-DPF | □□□□ □□□ □□□, □□


□□□□□□, □□□ □□ 3 - 26 mm□ / IP54 / UL Type 12



KT-DPF □□□□ □ □□ □□□□ □□□ □ □□□□. □□□ □□□ □□□ □ □□ □□□ □□□□.

KT-DPF □□□□ □□□□ □□□□ □□□□□ □□ □□□□□□□□ □□ □□□□□□.

KT-DPF □□□□ □□ □□□ □□□□□ **20%** □□ □□ □□□□□□.

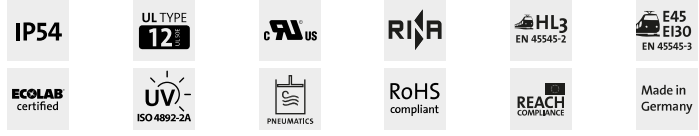


IP □□□□ (EN 60529)	IP54
UL Type (UL 50E)	UL Type 12
	□□□□□□
	UL94-V0, □□□□□□
	-40 C° to 100 C°
	□□□□ □□, □□□□□□


□□ □ □□

- □□□□ □□□□ □□ □□□□ □□□ □□□□□ □□ 3-26mm□ □□□ □□ □□□
- □□□□□ □□ □□ □□□□ □□□
- □□□ □□


□□ □□ □ □□□



EAN	41260		50 mm
□□□□ □	4251269306730	□□ □□	33 mm
	10	□□□□ □□	□□ □□□□
	1	attr.Klemmbereich kombiniert	3 - 12 mm
	□□(RAL 7035□ □□)	□□□□ □□ □	1 x 3 - 12 mm
	21 mm		
	21 mm		



EAN	41261		59 mm
□□□□ □	4251269306747	□□ □□	42 mm
	10	□□□□ □□	□□ □□□□
	1	attr.Klemmbereich kombiniert	4 - 18 mm
	□□(RAL 7035□ □□)	□□□□ □□ □	1 x 4 - 18 mm
	41,5 mm		
	42 mm		



EAN

□□□ □

41262

4251269306754

10

1

□□(RAL 7035□ □□)

41,5 mm

42 mm

□□ □□

□□□ □□

attr.Klemmbereich kombiniert

□□□ □□ □

59 mm

42 mm

□□ □□□

14 - 26 mm

1 x 14 - 26 mm

icotek[®]
smart cable management