



IP20



RoHS
compliant



Made in
Germany

Specifikationer


IP-Klass (EN 60529)	IP20
Material	Polyamid
Brandklass	
Temperatur	-20 C° till 50 C°
Monteringstyp	Skruvmontering

Fördelar

Produkttyper och storlekar



ArtNr.	81132	Plugg typ	C8 connector
EAN	4251269333071	Rated current	2,5 A
		Protection class	II (Protective insulation)
Antal	1	Färg	svart
Längd	85,2 mm		
Höjd	24 mm		
Bredd	63,2 mm		
Length connecting cable	600 mm		

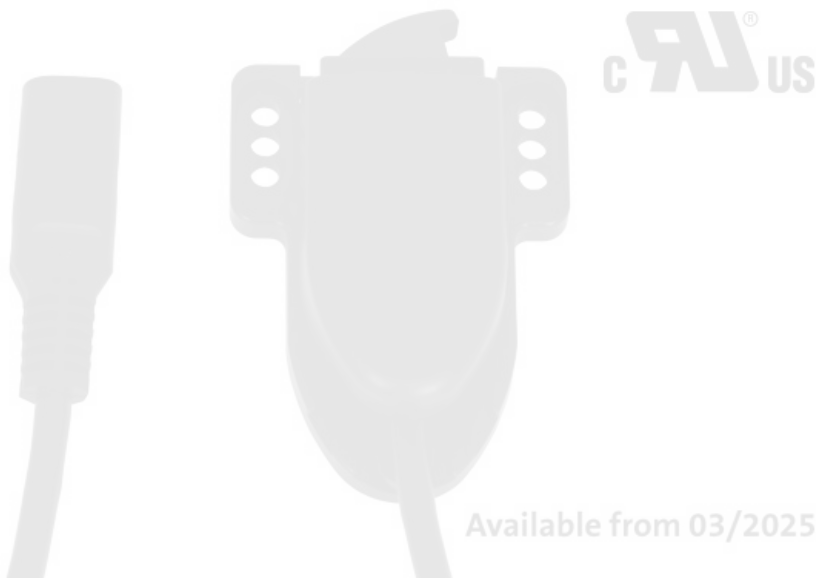

ArtNr.	81232	Length	600 mm
EAN		connecting	
Antal	1	cable	
UL-certifikat	UL-US-2442933-0 / UL-CA-2432446-0	Plugg typ	C8 connector
		Operating voltage	250 V AC, 25 W
		Rated current	2,5 A
Längd	85,2 mm	Protection class	II (Protective insulation)
Höjd	24 mm	Färg	svart
Bredd	63,2 mm		



ArtNr.	81334	Plugg typ	C8 connector, angled
EAN	4251269333002		
Antal	1	Rated current	2,5 A
Längd	85,2 mm	Protection class	II (Protective insulation)
Höjd	24 mm	Färg	svart
Bredd	63,2 mm		
Length	600 mm		
connecting			
cable			

ArtNr.	81133	Plugg typ	C8 connector
EAN	4251269333088	Rated current	2,5 A
		Protection class	II (Protective insulation)
Antal	1	Färg	svart
Längd	85,2 mm		
Höjd	24 mm		
Bredd	63,2 mm		
Length connecting cable	1.500 mm		



ArtNr.	81233	Length connecting cable	1.500 mm
EAN		Plugg typ	C8 connector
Antal	1	Operating voltage	250 V AC, 25 W
UL-certifikat	UL-US-2442933-0 / UL-CA-2432446-0	Rated current	2,5 A
Längd	85,2 mm	Protection class	II (Protective insulation)
Höjd	24 mm	Färg	svart
Bredd	63,2 mm		

Available from 03/2025



ArtNr.	81333	Plugg typ	C8
EAN	4251269332		connector,
	999		angled
Antal	1	Rated current	2,5 A
Längd	85,2 mm	Protection	II (Protective
Höjd	24 mm	class	insulation)
Bredd	63,2 mm	Färg	svart
Length connecting cable	1.500 mm		

icotek[®]
smart cable management